


# INCH FLANGE BEARING

All bearings are manufactured to inch standards.

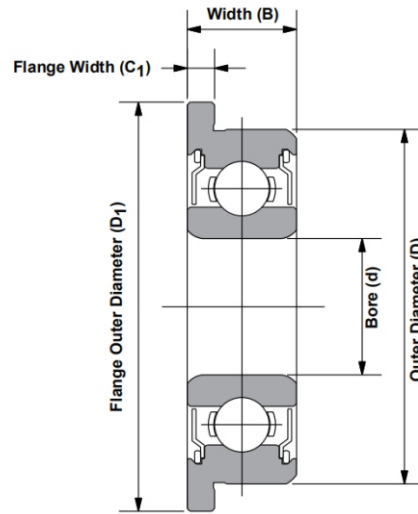

Model Reference		Bore Diameter	Outer Diameter	Flange Outer Diameter		Height		Flange Width		Chamfer	Cr(N)	Cor(N)	Max. Speed	
OPEN	SHIELD			OPEN	SHIELD	OPEN	SHIELD	OPEN	SHIELD		Basic	Basic	Grease	Oil
										Dynamic		*1000rpm		
FR0	FR0ZZ	1.191	3.967	5.156		1.588	2.38	0.33	0.787	0.1	138	35	110	130
FR1	FR1ZZ	1.397	4.762	5.944		1.984	2.779	0.584	0.787	0.1	231	66	90	110
FR1-4	FR1-4ZZ	1.984	6.35	7.518		2.38	3.571	0.584	0.787	0.1	310	108	67	80
FR133	FR133ZZ	2.38	4.762	5.944		1.588	2.38	0.457	0.787	0.1	188	60	80	95
FR1-5	FR1-5ZZ		7.938	9.119	2.779	3.571	0.584	0.787	0.15	550	175	60	71	
FR144	FR144ZZ	3.175	6.35	7.518		2.38	2.779	0.584	0.787	0.1	283	95	67	80
FR2-5	FR2-5ZZ		7.938	9.119	2.779	3.571	0.584	0.787	0.1	560	179	60	67	
FR2-6	FR2-6ZZ		9.525	10.719	2.779	3.571	0.584	0.787	0.15	640	225	53	63	
FR2	FR2ZZ		9.525	11.176	3.967	3.967	0.762	0.762	0.3	630	218	56	67	
FR155	FR155ZZ	3.967	7.938	9.119		2.779	3.175	0.584	0.914	0.1	360	149	53	63
FR156	FR156ZZ	4.762	7.938	9.119		2.779	3.175	0.584	0.914	0.1	360	149	53	63
FR166	FR166ZZ		9.525	10.719	3.175	3.175	0.584	0.787	0.1	710	270	50	60	
FR3	FR3ZZ		12.7	14.351	4.978	4.978	1.067	1.067	0.3	1300	485	43	53	
FR168	FR168ZZ	6.35	9.525	10.719		3.175	3.175	0.584	0.914	0.1	375	173	48	56
FR188	FR188ZZ		12.7	13.894	3.175	4.763	0.584	1.143	0.15	1080	440	40	50	
FR4	FR4ZZ		15.875	17.526	4.978	4.978	1.067	1.067	0.3	1480	615	38	45	
FR1810	FR1810ZZ	7.938	12.7	13.894		3.967	3.967	0.787	0.787	0.15	540	276	40	48
FR6	FR6ZZ	9.525	22.225	24.613		5.558	7.142	1.57	1.57	0.4	3350	1410	32	38